1100

PE tarpaulin Basic

BASIC 70 GR/M²

PE tarpaulins, lightweight and durable, find applications in camping, construction, agriculture, freight transport, events, vehicle protection, and industrial settings. Versatile and weather-resistant, they offer reliable protection in diverse environments.

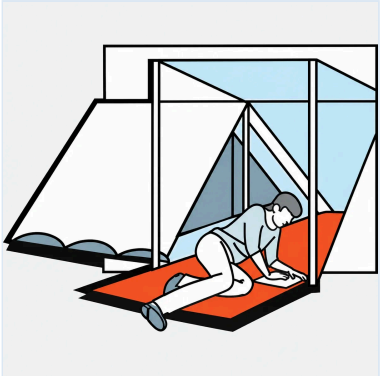

Technical specifications

Tensile strength	375N / 5cm According to ISO 13937-1
Tear strength	68N / 5cm According to ISO 13937-1
Temperature resistance	-40ºC / +80ºC

Product information

- Woven HDPE tape with both sides LDPE coating
- All around welded hem with reinforcing PP rope and aluminum eyelets every meter, inner ø12mm
- Each tarpaulin packed in a crystal clear PE bag, with neutral COVER insert leaflet, 4 languages and EAN-code
- Transport packing in sturdy 5-layer water resistant carton boxes
- Delivery on Euro pallets (80×120cm)
- Pallet height; semi approx. 125cm, full approx. 250cm

Customization

- Custom-size: small buying quantity, delivery time 3-4 months
- Different color and weight: minimum purchase order quantity approx. 70,000m², delivery time 3-4 months
- Private label, box or bale packing
- Product print possibility
- Optional: CORONA surface treatment technology for better adhesion of printed texts

- Optional: VCI anti-corrosion method actively protects your metal from oxidation (VpCI)

Sizes

Cut size (m)	Orange	Quantity per box	Quantity per half pallet	Quantity per full pallet
3 × 4	✓	20	400	640
4 × 6	✓	10	200	300
5 × 6	✓	8	160	256
6 × 8	✓	5	100	120
6 × 10	✓	4	80	108
8 × 10	✓	3	60	81
10 × 12	✓	2	40	48