1300FR

PE tarpaulin Standard FR

STANDARD 140 GR/M²

Flame-retardant PE tarpaulins provide safe protection against fire in various applications including events, construction, and industry. These durable and reliable tarps meet fire safety standards, offering peace of mind in critical situations.

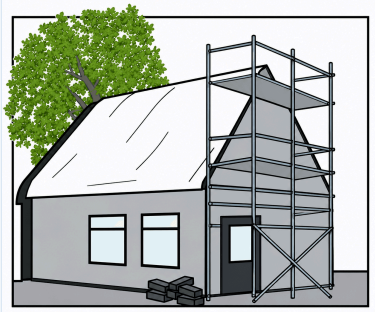

Technical specifications

Tensile strength	857N / 5cm According to ISO 13937-1
Tear strength	187N / 5cm According to ISO 13937-1
Temperature resistance	-40ºC / +80ºC

Product information

- Woven HDPE tape with both sides LDPE coating
- All around welded hem with reinforcing PP rope and aluminium eyelets every meter, inner ø12mm
- Each tarpaulin provided with stitched FR label
- Flame Retardant (FR) product; concerning test report DIN4102-B1 available
- Each tarpaulin packed in a crystal clear PE bag, with neutral COVER insert leaflet, 4 languages and EAN-code
- Transport packing in sturdy 5-layer water resistant carton boxes
- Delivery on Euro pallets (80×120cm)
- Pallet height : semi pallet approx. 125cm, full pallet approx. 250cm
- 12 months warranty on UV resistance

Customization

- Custom-size: small buying quantity, delivery time 3-4 months
- Different color and weight: minimum purchase order quantity approx. 35,000m², delivery time 3-4 months
- Private label, box or bale packing

- Product print possibility
- Optional: CORONA surface treatment technology for better adhesion of printed texts
- Optional: VCI anti-corrosion method actively protects your metal from oxidation (VpCI)

Sizes

Finished size (m)	White	Quantity per box	Quantity per half pallet	Quantity per full pallet
2 × 3	✓	20	400	560
3 × 4	✓	10	200	280
4 × 6	✓	4	96	144
6 × 8	✓	3	48	72
8 × 10	✓	1	28	40
10 × 12	✓	1	16	28