
1300

PE tarpaulin Standard

STANDARD 140 GR/M²

PE tarpaulins, mediumweight and durable, find applications in camping, construction, agriculture, freight transport, events, vehicle protection, and industrial settings. Versatile and weather-resistant, they offer reliable protection in diverse environments.

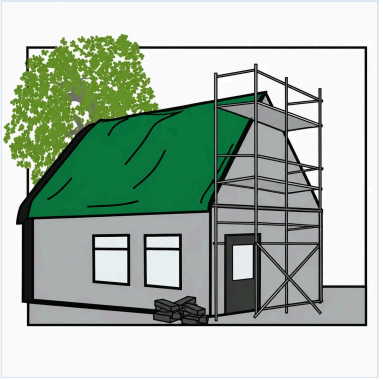

Technical specifications

Tensile strength	857N / 5cm According to ISO 13937-1
Tear strength	187N / 5cm According to ISO 13937-1
Temperature resistance	-40ºC / +80ºC

Product information

- Woven HDPE tape with both sides LDPE coating
- All around welded hem with reinforcing PP rope and aluminum eyelets every meter, inner ø12mm
- Each tarpaulin packed in a crystal clear PE bag, with neutral COVER insert leaflet, 4 languages and EAN-code
- Transport packing in sturdy 5-layer water resistant carton boxes
- Delivery on Euro pallets (80×120cm)
- Pallet height; semi approx. 125cm, full approx. 250cm
- 12 months warranty on UV resistance

Customization

- Custom-size: small buying quantity, delivery time 3-4 months
- Different color and weight: minimum purchase order quantity approx. 35,000m², delivery time 3-4 months
- Private label, box or bale packing
- Product print possibility
- Optional: CORONA surface treatment technology for better adhesion of printed texts

- Optional: VCI anti-corrosion method actively protects your metal from oxidation (VpCI)

Sizes

Finished size (m)	Green	Blue	White	Black	Quantity per box	Quantity per half pallet	Quantity per full pallet
2 × 3	✓	✓	✓	✓	20	400	560
3 × 4	✓	✓	✓	✓	10	200	280
3 × 5	✓		✓	✓	8	160	224
3 × 6	✓		✓		8	128	224
4 × 5	✓	✓	✓		6	120	192
4 × 6	✓	✓	✓	✓	4	96	128
4 × 8	✓		✓		4	64	112
5 × 6	✓	✓	✓		4	80	112
6 × 8	✓	✓	✓	✓	3	48	72
6 × 10	✓	✓	✓	✓	2	40	56
6 × 12			✓		1	32	48
8 × 10	✓	✓	✓	✓	1	32	40
8 × 12	✓		✓		1	24	36
10 × 10			✓		1	24	32
10 × 12	✓	✓	✓	✓	1	20	28
10 × 15	✓	✓	✓	✓	1	16	24
10 × 20	✓	✓	✓		1	12	16
15 × 20	✓	✓	✓		1	8	8
20 × 20	✓	✓	✓		1	4	8