1965FR

PE fabrics FR

Flame-retardant PE woven fabric rolls are processed into tarpaulins, bags, and covers by cutting and sewing them to size. This provides tailored solutions for various applications, including protection of goods, storage, and transportation, while ensuring enhanced safety against fire hazards.

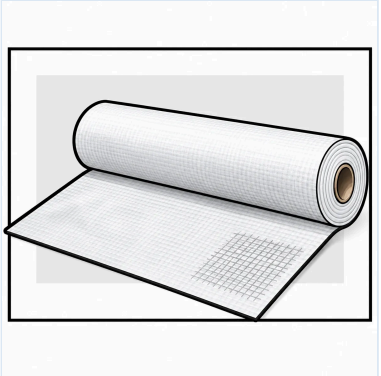

Technical specifications

Tensile strength	970N / 5cm According to ISO 13937-1
Tear strength	68N / 5cm According to ISO 13937-1
Temperature resistance	-40°C / +80ºC

Product information

- Woven HDPE tape with both sides LDPE coating
- Each roll on a 76mm ø hard paper core
- Wrapped in same color as the sheet color with size sticker, 4 languages and EAN code

Customization

- Roll width : 5cm till 4mtr, delivery time 3-4 months
- Different color and weight, delivery time 3-4 months
- Print possibility
- Optional: CORONA surface treatment technology for better adhesion of printed texts
- Optional: VCI anti-corrosion method actively protects your metal from oxidation (VpCI)

Sizes

Size (m)	Quality	Weight (g/m²)	White NVO	Quantity per pallet
2 × 100	Plus NVO	200	✓	35