
2030

PE leno tarpaulin Plus 200 g/m²

PLUS 200 GR/M²

You may also be interested in.

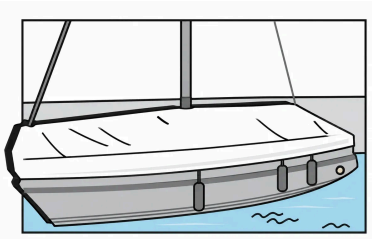

Technical data

Tensile strength	540N / 5cm (ISO 13937-1)
Tear strength	94N / 5cm (ISO 13937-1)
Temperature resistance	-40ºC / +80ºC

Product information

- HDPE fabric with a transparent LDPE coating on both sides
- 2% UV-stabilised
- Welded hem all round with reinforcing PP rope and aluminium eyelets every 50 cm, inner diameter ø12 mm
- Each tarpaulin packed in a crystal-clear PE bag with a neutral COVER insert sheet, in 4 languages and with EAN code
- Transport packaging in sturdy 5-ply water-resistant cardboard boxes
- Delivered on Euro pallets (80 × 120 cm)
- Pallet height: half pallet approx. 125 cm, full pallet approx. 250 cm
- 12-month warranty on UV resistance

Customisation

- Custom size: small order quantities possible, delivery time 3-4 months
- Custom colour and weight: minimum order quantity (MOQ) approx. 20,000 m², delivery time 3-4 months
- Private label: packaging in box or bale possible
- Printing: the product can be printed

- Optional: CORONA surface treatment for better adhesion of printed texts

Sizes

Finished size (m)	White	Quantity per box	Quantity per half pallet	Quantity per full pallet
2 × 3	✓	20	240	440
3 × 4	✓	10	120	200
4 × 5	✓	8	96	160
4 × 6	✓	3	60	112
4 × 8	✓	2	48	80
5 × 6	✓	2	48	80
6 × 8	✓	3	32	48
6 × 12	✓	1	20	32
8 × 10	✓	1	20	32
8 × 12	✓	1	12	16
8 × 14	✓	1	12	16
10 × 12	✓	1	12	16