2200FR

PE debris net FR

STANDARD 60 GR/M²

Flame-retardant scaffold nets are essential for safety at construction sites and events. Meeting strict standards, they minimize fire risk and damage, making them a vital investment for a secure work environment.

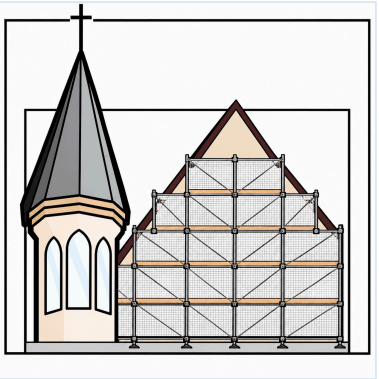

Technical specifications

Tensile strength	264N / 5cm According to ISO 13937-1
Tear strength	56N / 5cm According to ISO 13937-1
UV resistance	300Kly
Temperature resistance	-40ºC / +80ºC

Product information

- HDPE monofilament knitted net
- 3% UV stabilized
- Eyelet band along both long sides (single) and in the centre (double), provided with Ø 12mm with button holes at every 3cm interval
- Each net 1x folded and rolled, packed in a crystal clear PE bag with a neutral COVER label, 4 languages and EAN code
- Delivery on block pallets (100×120cm)
- Pallet height approx. 250cm

Customization

- Custom-size, different color and/or weight, minimum order quantity and terms of delivery after consultation
- Private label, roll packing
- Also available in Flame Retardant (FR) quality
- Product print not possible

Sizes

Size (m)	White NVO	Rolls per pallet
2.57 × 100	✓	25
3.07 × 100	✓	25